


MC 2335



工业和手工用臂式缝纫机 Cylinder Bed Union Feed Lockstitch Machine

- 应用于筒式的或者附着于针织上的物品。
- 在皮革业，包，皮革艺品的标准缝纫。
- 鞋子，皮革服装，人造皮革或者纺织袋子的包边。
- 筒式缝纫，如包，手提箱，室内装潢品等。
- Working on tubular or pre-attached articles .
- Standard sewing work on leather wear, bags and leathercraft articles .
- Binding of shoes and leather wear with leather-, imitation leather- or textile tape.
- Piping work on bags, suitcases and upholstery.

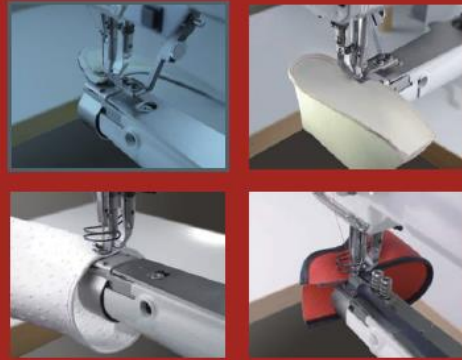

	Mode									
		-900/52	-911/97**	-911/97**	-2/27	-6/01	-17/01-650/03	-39/21*	-40/64*	
MC 2335	B				X	X	X	X	X	
MC 2335	B	★	★	★	X	X	X	X	X	
<p>组合式缝纫，有小套工具装备，可以安装于机器前臂。 For portfolio work. A smaller version of the kit (part set is smooth) Ruler mounted on the forearm.</p> <p>普通缝纫，工作的标准部件配置 For general sewing. Standard form of the kit.</p> <p>用于包边缝纫，90度角送布装置，安装于臂口。 For binding operations, 90° tape feeder, attachment on swing-mounted carrier mounted (without binder).</p> <p>用于包边缝纫时，两个折边好后，使用90度角送布装置，安装在可输入的支架上。 For binding operations, both edges folded in, 90° tape feeder, attachment on swing-away carrier mounted.</p> <p>筒式缝纫在两层厚度的织物上，导管装置可取消，附件固定，可用于针距2.5mm，或最大为4.5mm针距。 Sewing in piping between two material plies, piping guide retractable, attachment fixed. Available as N 2.5 (stitch length max. 2.5 mm) or for max. stitch length of 4.5 mm.</p>										