

NS-1010G-01S
NS-1310G-01S
NS-1510G-01S
NS-2210G-01S

Electronic Pattern Sewing Machine With Solenoid Control
电磁式抬压脚电子花样机

+

行内超快的缝纫速度, 线迹美观、
高效节能。

High Speed, Beautiful Stitch,
Energy-saving.



NS-1010G-01A
NS-1310G-01A
NS-1510G-01A
NS-2210G-01A

Electronic Pattern Sewing Machine
气动式抬压脚电子花样机

+

卓越的缝纫速度, 美观的
线迹效果。

High Speed, Beautiful Stitch,
Energy-saving.



应用范围 / Range of application



产品特点 / Product features

运用第四代伺服步进驱动技术
Using the fourth-generation servo step drive technology

马达运行更精准。长时间工作状态下, 马达温升更低, 响应速度更快,
同比普通机型, 线迹完美度提升。

The motor runs more accurately. Under the long working condition, the temperature rise of the motor is lower and the response speed is faster. Compared with ordinary models, the perfect degree of the line track is improved.

标记断线感应器
Thread breaking sensor

用于感应机器断线, 检测到断线时, 缝纫操作将自动停止, 并报警提示。
When the thread is broken, the sewing operation will stop automatically and alarm prompt.



应用范围 / Range of application




产品特点 / Product features



可配备数码夹线器和断线感应器
Equipped with thread catch and thread breaking sensor

支持USB数据接口 简单改变缝制图案
Support USB data interface Change the patterns simply

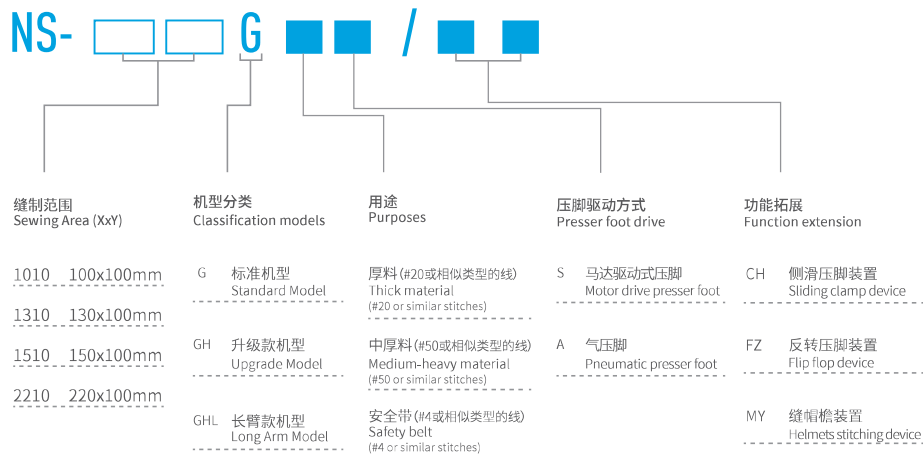

性能参数 / The performance parameters

型号 Model	平缝 Stitching	2倍旋梭 2-time Hook	缝制面积 Sewing Area	针距 Stitch length	切线装置 Thread trimmer	扫线装置 Scavenging Device	最高缝纫速度 Highest Sewing Speed	气压 Air Pressure
NS-1010GH	★	2	100x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-1310GH	★	2	130x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-1510GH	★	2	150x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min
NS-2210GH	★	2	220x100mm	0.05 - 12.7mm	★	★	2,800 rpm	1.71 l/min

性能参数 / The performance parameters

规格 Specification	1010GH -01S	1310GH -01S	1510GH -01S	2210GH -01S	1010GH -01A/CH	2210G -01A/KX	1010GH -01A	1310GH -01A	1510GH -01A	2210GH -01A
使用缝纫机 Using	平缝花饰缝纫机 (2倍旋梭) Flat-stitching pattern sewing machine(2-time hook)									
线迹 Stitch	单针平缝 Single-needle flat seam									
最高缝纫速度 Max. sewing speed	2800 rpm									
缝制区域(Max.mm) Sewing area (X × Y)	100x100	130x100	150x100	220x100	100x100	220x100	100x100	130x100	150x100	220x100
送布装置 Feeding device	伺服马达驱动 Intermittent feed (pulsed motor drive)									
针距 Stitch length	0.05-12.7mm									
最大针数 Max. number of stitches	20000针/1个图案 20000 needle / 1 pattern									
压脚驱动方式 Press the foot drive mode	气动 pneumatic									
压脚高度 Height of presser foot	最大Max. 30mm									
两步压脚 Two-step presser foot	一体式压脚 One-piece presser foot									
间歇压脚上升量 Intermittent pressure rise	22 mm									
间歇压脚行程 Intermittent pressure on the trip	0或(or)2 - 10 mm (出厂设置 factory setting: 3mm)									
使用旋梭 Hooks	两倍摆梭 (标准摆梭是选配件) Twice the shuttle (standard shuttle is optional)									
扫线装置 Sweep line device	标准装备 Standard equipment									
切线装置 Tangent device	标准装备 Standard equipment									
数据存储方式 Data storage	可变电子夹线器 Variable electronic gripper									
马达 Motor	AC伺服马达750W AC servo motor 750W									
电源 Power supply	单相Single phase100~120V、200~240V、三相Three phase 200~240V、380~415V、350V									
气压 Air pressure	0.5Mpa、1.8L/min									